




- ◆ Built-in radio receiver, radio control
- ◆ Motor running very smooth and quiet
- ◆ Programming by transmitter
- ◆ Compatible with any type of BOFU transmitters
- ◆ Applicable to Roller Blinds or Roman Blinds

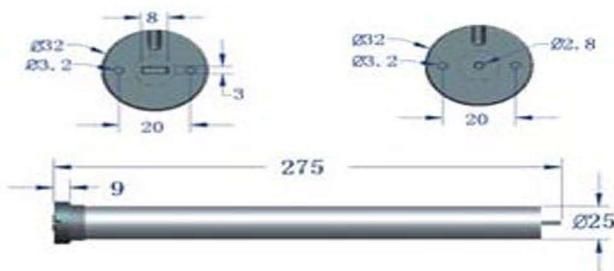

Model	EY2512-0.7/34	EY2524-0.7/34	EY2512-2/28	EY2524-2/28
Nominal torque(Nm)	0.7	0.7	2	2
Stall torque at 25°C(Nm)	1.0	1	3	3
Nominal speed(rpm)	34	34	28	28
No load speed(rpm)	38	38	32	32
Maximum number of turns in one direction	No limit	No limit	No limit	No limit
Current consumption at nominal torque(mA)	800	400	800	500
current consumption at stall(mA)	1200	800	1200	800
Nominal supply voltage(v)	12	24	12	24
Minimum supply voltage(v)	9.5	17	9.5	17
Maximum running time(min)	No limit	No limit	No limit	No limit
Working temperature(°c)	-10 to 60	-10 to 60	-10 to 60	-10 to 60
Supply cable type(mm ²)	2x0.20	2x0.20	2x0.20	2x0.20
Supply cable lengthy(mm ²)	2.0	2.0	2.0	2.0
Net Weight(g)	220	220	272	272

Compatible With Below Controls

Transformer



Transmitter

