



ZGA60FHH-G(A8044)

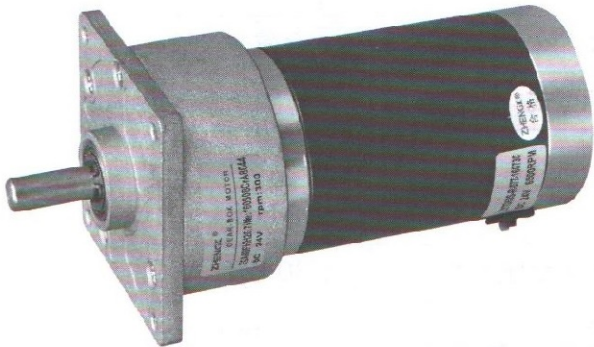

外壳材质	金属
输出轴承型式	滚珠轴承
径向力	≤ 15 kgf
轴向力	≤ 8 kgf
主轴最大承受压入力	≤ 30 kgf
径向间隙	≤ 0.1 mm
轴向间隙	≤ 0.5 mm

Dimension(mm)

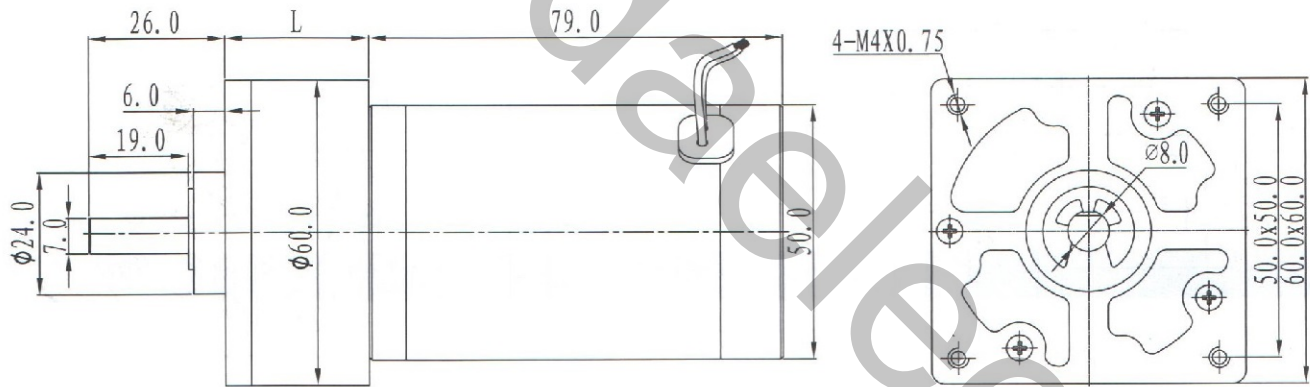

Specifications

形式	减速比	1/6.3	1/7.9	1/9.2	1/20.7	1/26	1/31	1/68	1/86	1/101	1/225	1/335	1/355	1/745	1/1100
ZYTD-50S-R (12V-2000R)	空载转速 (r/min)	320	255	220	97	77	65	30	23	20	9	6	6	3	2
	负载转速 (r/min)	265	215	185	81	65	54	26	21	18	9	6	6	3	2
	负载力矩 (kgf.cm)	2	2.6	3	6.3	8	9.5	15	15	15	20	20	25	25	25
ZYTD-50S-R (24V-3000R)	空载转速 (r/min)	480	380	330	146	116	97	44	35	30	13	9	9	4	3
	负载转速 (r/min)	400	320	275	122	97	82	39	32	27	13	9	9	4	3
	负载力矩 (kgf.cm)	2	2.6	3	6.3	8	9.5	15	15	15	20	20	25	25	25
回转方向	电源正极接 + 端子	CCW			CW			CCW			CW		CCW		

Gearbox

减速比	L	段数	额定力矩	
	mm		mN.m	kgf.cm
1/6.3~1/9.2	27.5	2	980	10
1/20.7~1/31	30	3	1176	12
1/68~1/101	32.5	4	1470	15
1/225~1/335	36.5	5	1960	20
1/355~1/1100	41.3	6	2450	25