

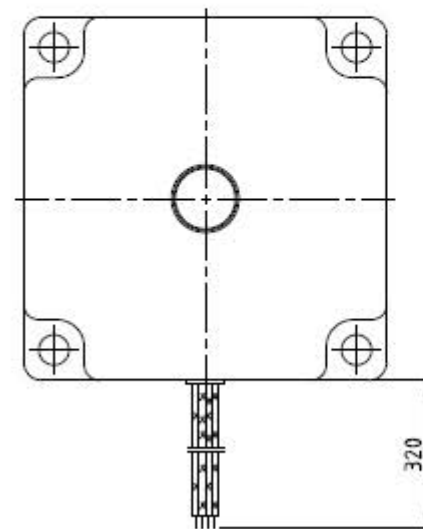
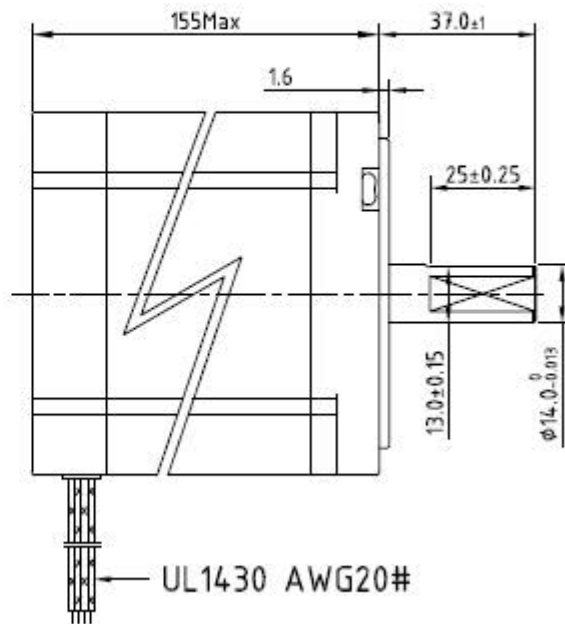


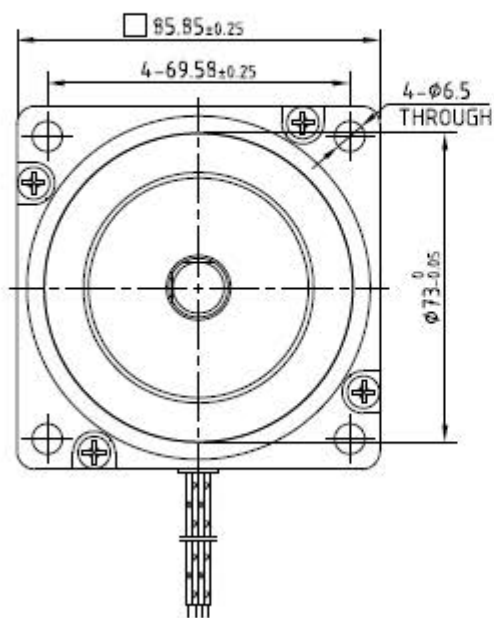

COMMON RATINGS

Step angle	1.8°
Position accuracy	1.8°±0.09°
Number of phase	2
Temp rise(Max)	80°C
Dielectric strength	500VDC
Insulation resistance	100MΩhm(500VDC)
Radial play	Max 0.025mm(Load 450g)
Axial play	Max 0.075mm(Load 920g)
Insulation class	B
Protection level	---

SPECIFICATION


34H2160-025S	
Current/phase: A	6.0
DC Resistance: Ω±10%	0.72
Inductance/phase:mH±20%	6.5
Holding torque: N.m	12.0
Inertia: Kg.cm ²	5.4
Weight: Kg	5.1



تهران خیابان جمهوری بین حافظ و سی تیر
 ساختمان عباسیان پلاک 48 فروشگاه لاندالکترونیک
 (10 خط ویژه) 66700456-021

www.landaelectronic.com

UNIT:mm
 第一角画法
 FIRST ANGLE VIEW



批准 Approve		2016.04.16
标准化 Standard		2016.04.16
工艺 Technology		
审核 Check		
设计 Design	丁静超	2016.04.16

34H2160-025S

NAMES	SIGNATURE	DATE	NO: 065223	SCALE 1:1	SHEET 1 OF 1
-------	-----------	------	------------	-----------	--------------