

General Specification

Step distance accuracy -----5%

Temperature Rise ----- 80°Cmax

Ambient Temperature ----- -20°C~+50°C

Insulation Resistance 100 MΩ Min. , 500VDC


Dielectric Strength: ----- 500VAC for 1minute

Shaft Radial Play ----- 0.02Max. (450g-load)

Shaft Axial Play ----- 0.08Max. (450g-load)

Detailed Product Technical Data Sheet

Model	Step Angle(°)	Motor Length (mm)	Rated Current (A)	Phase Resistance (Ω)	Phase Inductance (mH)	Holding Torque (N.m)	Lead Wire (No.)
F-57BYG1812	1.8	56	3	0.9	1.3	1.2	4

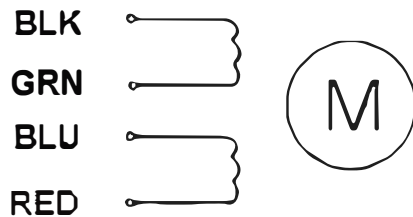

4Leads