

**Characteristics:**

High Power, High Efficiency

**Specifications:**

Dimensions	: Ø 44.7 X 75.6 mm
Shaft Diameter	: Ø 5.000 mm
Input Voltage	: 230.0 V DC , Rectified , 50 Hz
No Load Speed	: 11701 rpm
Maximum Efficiency	: 65 %
Torque at Maximum Efficiency	: 97.47 mNm
Speed at Maximum Efficiency	: 8849 rpm
Other Feature	: Plate rating power 500Wi for 5-10 seconds
Weight	: 420 g
Operation Temperature	: -10 to 55 °C
Storage Temperature	: -20 to 80 °C
Electrical Connection	: Terminal


**Performance Data:**

	No Load	Max Efficiency
Current (A)	0.13	0.69
Efficiency (%)	-	65
Output Power (W)	-	90.40
Speed (rpm)	11701	8849
Torque (mNm)	-	97.47

**Application Examples:**

Hand Blenders

Drawing:

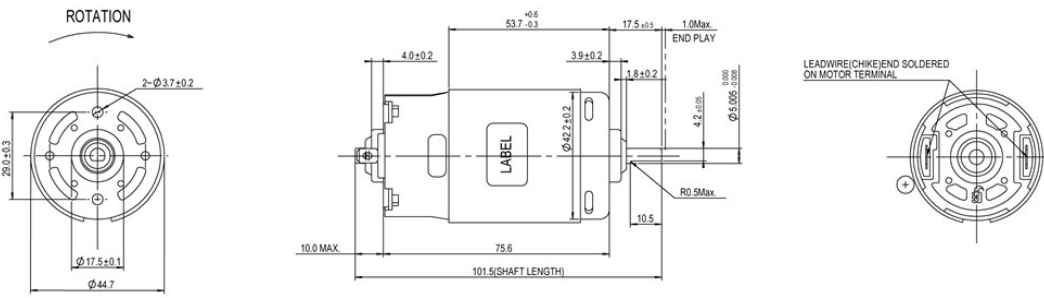

Performance Curves:



Units in Metric