


N20/30
FF030
RF130
BLDC 1632
FF130
FF180
RF500
RF300
RF310
094
BLDC 2035
370
2418
2430
385
2838
395
30-C
32-C
40-C
32ZY13
32ZY25
520
BLDC 520
380
555
BLDC 3640
775
38S
BLDC 38S
45S
BLDC 45S
50S
BLDC 50S
60S
BLDC 60S
80S
稳压器
同步电机
永磁直流电机
交流可逆电机

ZGX45RGG(A8X87)



Dimension(mm)

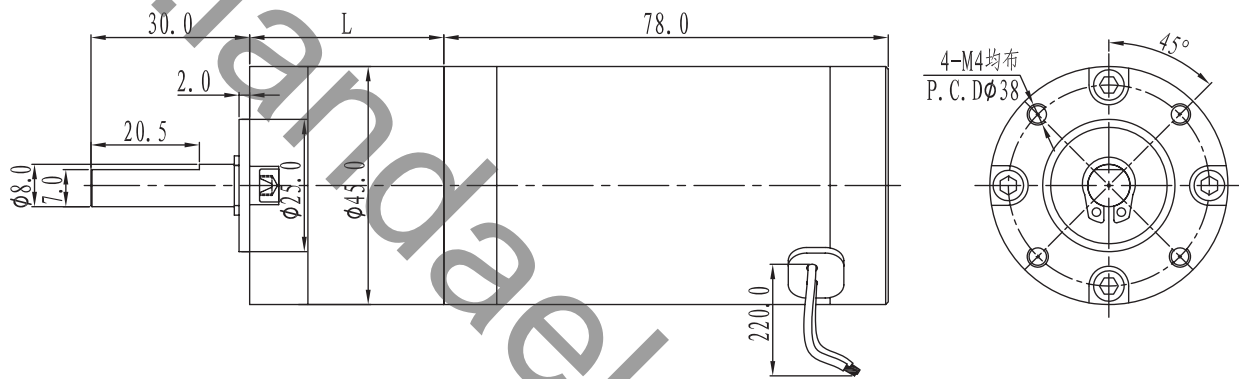

Specifications

DC Motor	Ratio	1/6	1/22.5	1/30	1/36	1/112.5	1/150	1/276	1/562.5	1/675	1/810	1/972	1/2812	1/3375	1/4050	1/4860
ZYTD-45S-R (12V-2000R)	No load (r/min)	330	89	66	55	18	13	7.2	3.53	2.95	2.46	2.05	0.7	0.59	0.49	0.41
	On load (r/min)	265	71	53	44	15	12	6.8	3.38	2.84	2.38	2	0.7	0.59	0.49	0.41
	Rated torque (kgf.cm)	1.3	4.3	5.9	7	15	15	15	20	20	20	20	30	30	30	30
ZYTD-45S-R (24V2500R)	No load (r/min)	500	135	99	66	27	20	10.8	5.29	4.41	3.67	3.06	1.06	0.88	0.73	0.61
	On load (r/min)	390	105	78	55	23	18	10.2	5.27	4.27	3.58	3	1.06	0.88	0.73	0.61
	Rated torque (kgf.cm)	1.6	5.5	7.3	6	15	15	15	20	20	20	20	30	30	30	30
Direction	电源正极接 + 端子	CCW														

Gearbox

Reduction Ratio	L	Stages	Allowable torque	
	mm		mN.m	kgf.cm
1/6	26.7	1	392	4
1/22.5~1/36	36.7	2	784	8
1/112.5~1/276	46.7	3	1470	15
1/562.5~1/972	56.7	4	1960	20
1/2812~1/4860	66.7	5	2940	30

★Other specification can be customized.