
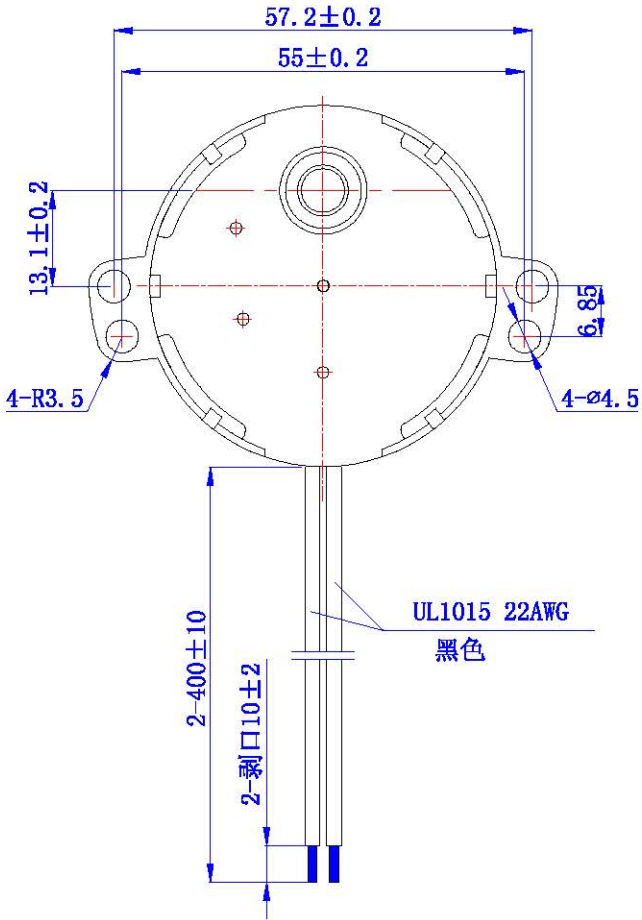
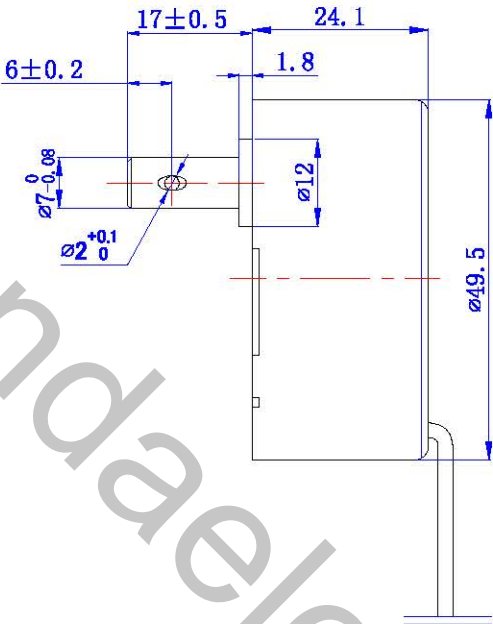


66'00'.91'.40911

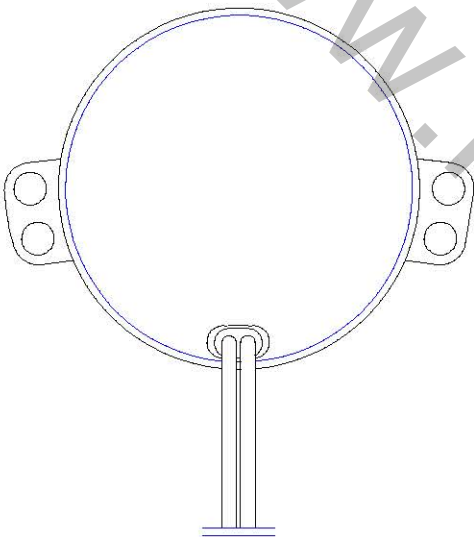

SPECIFICATION

- | | |
|----------------------------|---------------------------|
| 1. Rated voltage: | AC 220-240V |
| 2. Rated frequency: | 50/60Hz |
| 3. Power consumption: | <4W |
| 4. Inp current: | ≤20mA |
| 5. Torque: | ≥0.4kgf. cm (220V/50Hz冷态) |
| 6. Speed: | 15/18 r/min |
| 7. Starting voltage: | 187V/50Hz |
| 8. Insultion resistance: | ≥100MΩ |
| 9. Dielectric strength: | 1800V/1S |
| 10. Noise: | ≤45dB |
| 11. Coil temperature rise: | ≤65K (220V/50Hz) |
| 12. Diversion: | CCW |
| 13. Insulation class: | A |

0.5~3	>3~6	>6~30	>30~120	>120~400
±0.2	±0.3	±0.5	±0.8	