

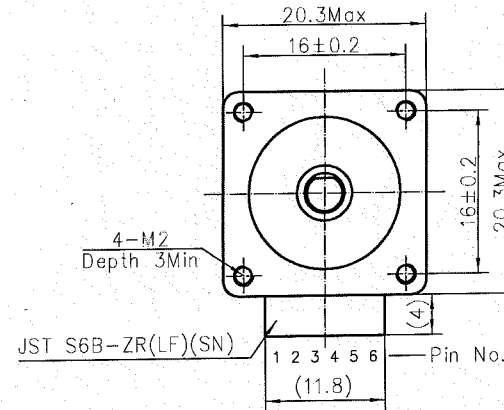


4611110029036

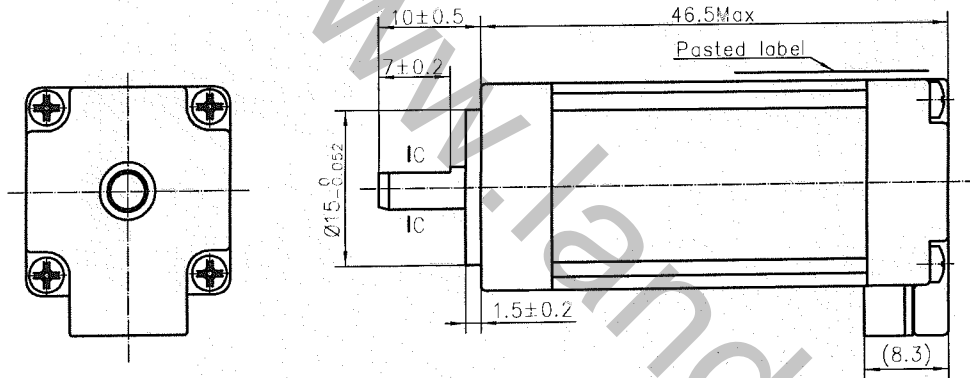

接线图

Wiring Diagram



励磁顺序 vs. 旋转方向

Exciting Sequence vs.
Direction of Rotation

STEP	A	B	C	D	CW
1	+	+	-	-	↑
2	-	+	+	-	
3	-	-	+	+	
4	+	-	-	+	

从安装面看为顺时针方向

Clockwise view from mounting side.

铭牌 Label Detail

MOONS' STEPPING MOTOR
TYPE MS08HY5P4060
XXXXXXXX YY/MM/DD

Work Order


加工单号

Date Format

日期格式

规格 Specifications

1. 相数 Number of Phase	2
2. 步距角 Step Angle	1.8°
3. 额定电压 Rated Voltage	4.8V DC
4. 额定电流 Rated Current	0.6Amp
5. 保持力矩 Holding Torque	58mNm Typ.(Two phase on/rated current)
6. 相电阻 Phase Resistance	8ohm±10%(20°C)
7. 相电感 Phase Inductance	6.1mH±20%(1kHz 1V rms)
8. 转子惯量 Rotor Inertia	4.2gcm ²
9. 电机重量 Motor Weight	0.08kg
10. 绝缘等级 Insulation Class	B(130°C)



Unit: mm

第一角画法


FIRST ANGLE METHOD

未注线性与角度尺寸公差
Unannotated linear and angular dimensions without
tolerance indicate ISO 2768-1:2013

GB/T 1804-2000 eqv ISO 2768-1:2013

未注形状与位置尺寸公差
Unannotated shape and position dimensions without
tolerance indicate ISO 1101:2004

GB/T 1182-2008 eqv ISO 1101:2004



批准 Approve

标准化 Standard

工艺 Technology

审核 Check

设计 Design

NAMES

SIGNATURE

DATE

MOONS'

Hybrid Stepping Motor

Shanghai Moons' Electric Co., Ltd.

This document is released for information only. Its reproduction
in whole or in part or its dissemination to third parties is prohibited.
All trademarks and registered trademarks appearing on this
document are the property of their respective owners.

Type: MS08HY5P4060

Rev.A

SCALE 2:1

Sheet 1 of 1

REV.

版本记录 REVISION RECORD

DATE

UNLESS OTHERWISE SPECIFIED